
NORICA ADJUSTABLE TRIGGER SYSTEM (NATS) 745

Currently used on the following models: Marvic 2.0, Marvic 2.0 Luxe, Black Eagle, Storm, Hawk GRS, Hawk GRS Elegance, Dead Eye GRS and Dead Eye GRS Camo.

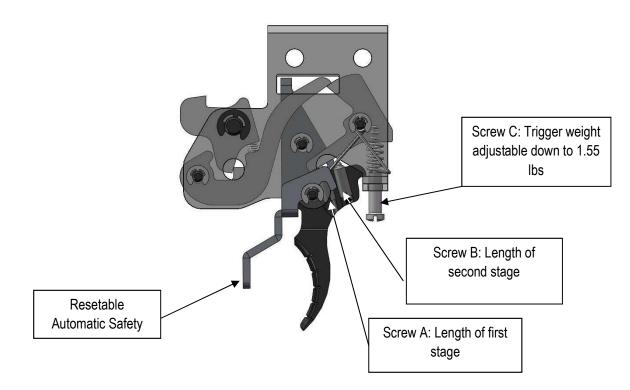

<u>WARNING:</u> The following procedures pose a serious health risk and may cause damage to your air rifle if not performed properly. Any modification of the trigger group may cause accidental discharge. Pay attention and strictly observe safe gun handling.

Norica triggers leave our factory properly adjusted and configurated. WE HIGHLY RECOMMEND NOT TO MODIFY IT.

If an experienced shooter wants to adjust it according to its preferences, the following indications must be followed.

- First stage adjustment (Screw A):
 - For a longer first stage, rotate screw A counterclockwise. Ư
 - For a shorter first stage, rotate screw A clockwise. ひ
- Second stage adjustment (Screw B):
 - \circ For a longer second stage, rotate screw A counterclockwise. ${f O}$
 - \circ For a shorter second stage, rotate screw A clockwise. ${f U}$
- Trigger Weight adjustment (Screw C):
 - \circ To reduce trigger weight, rotate Screw C counterclockwise. ${f O}$
 - To increase trigger weight, rotate Screw C clockwise. ひ

WARNING:

- If the trigger weight is below 2.2lbs Automatic Safety may not be activated and the gun could accidentally fire if dropped.
- Modification of the air rifle mechanism may cause a malfunctioning and make it unsafe to use.
- We highly recommend the assistance of a professional gunsmith for any air rifle modification.